KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 2A3

General data

Filament specifications:	Voltage	2.5 V
	Current	2.5 A

Amplification Factor 3.8

Power Amplifier class A1

Maximum

DC Plate Voltage	300 V
DC Plate Current	100 mA
Dissipation	20 W

DC Plate Voltage	250 V
DC Plate Current	70 mA
Grid Voltage	-45 V
Plate Resistance	750 ohm
Transconductance	5.2 mA/V

CONNECTION OF THE VALVE BASE 2A3

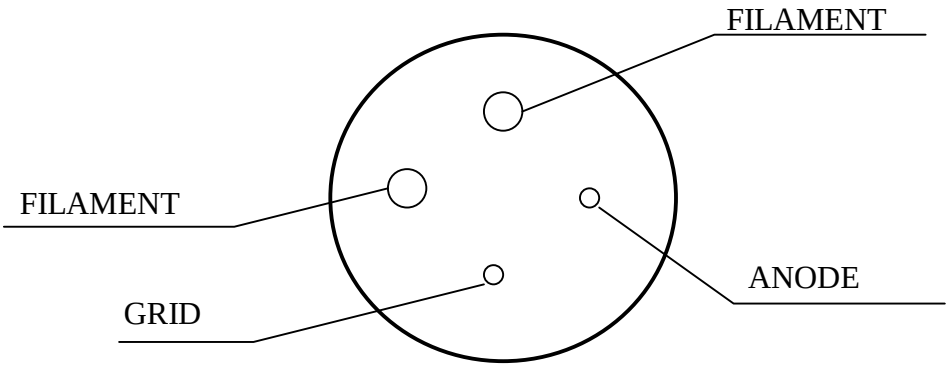

VIEW FROM BELOW

Plate characteristics 2A3

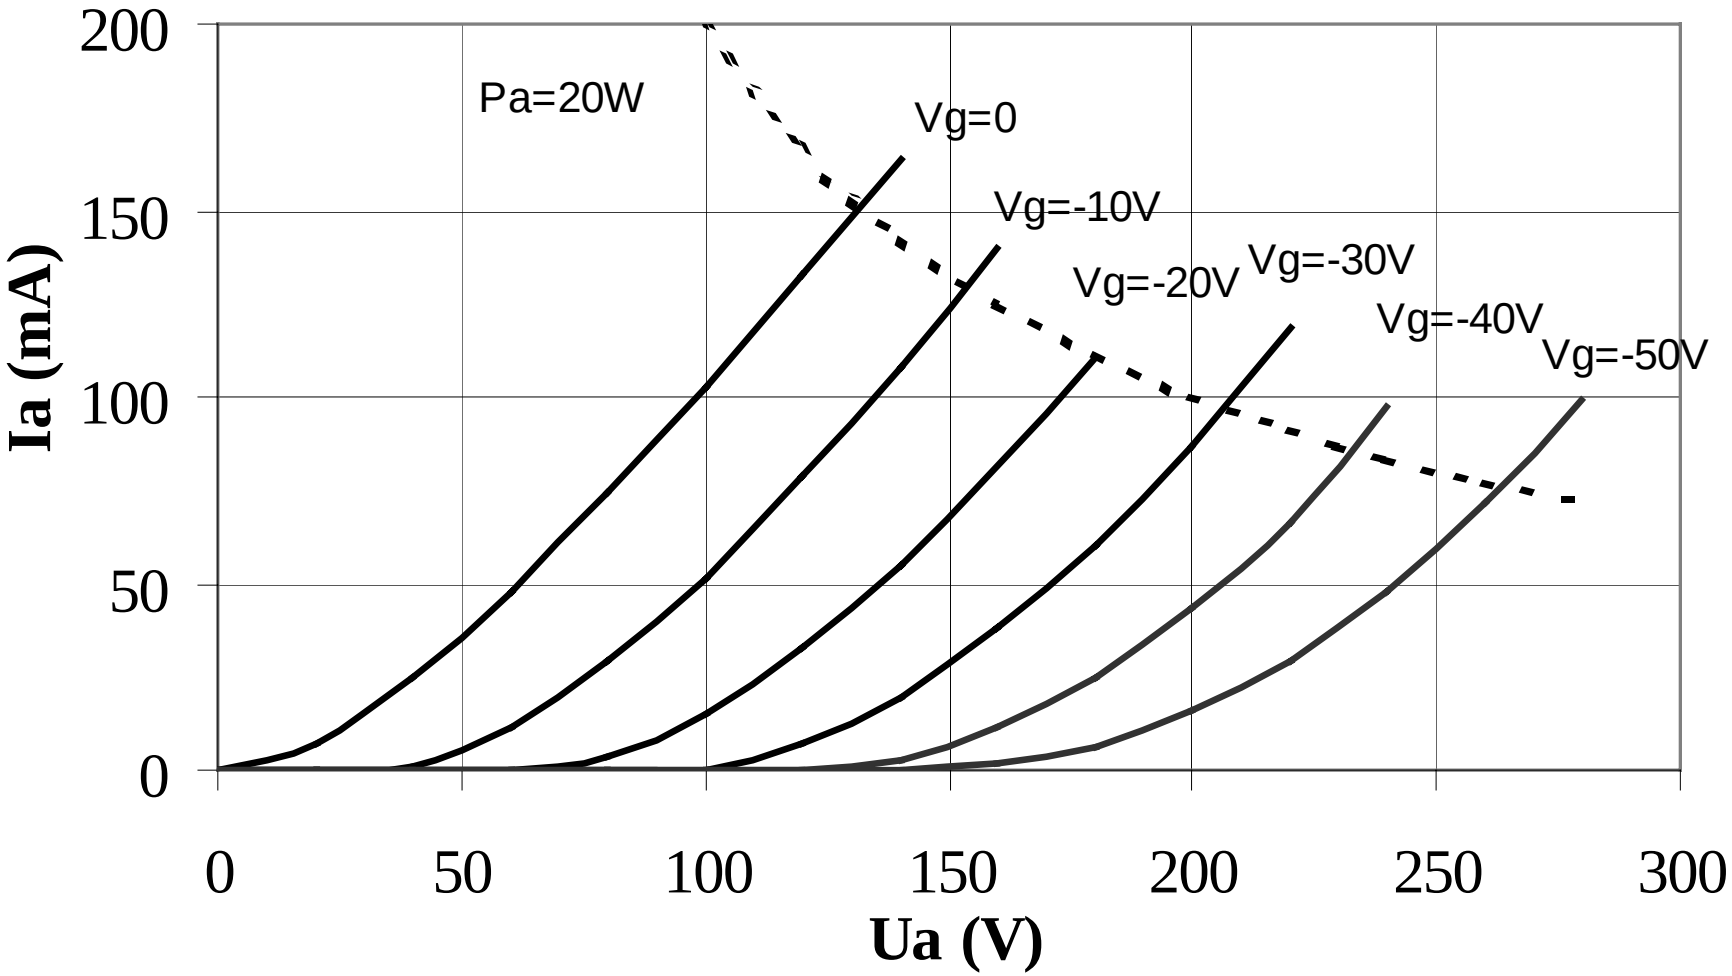

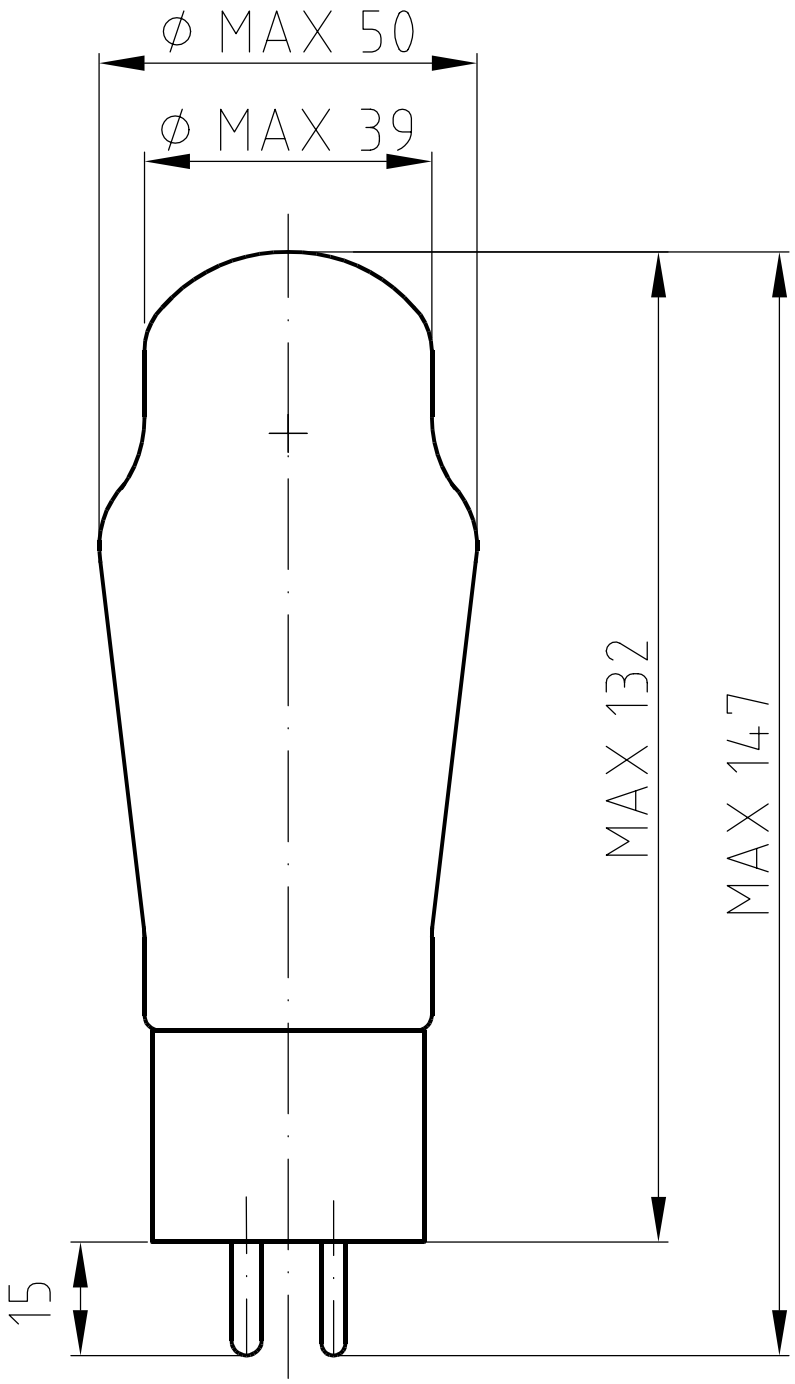

KR 2A3